


Pneumatic Tacker Type 14/50-763 A

This light, well balanced and rugged heavy duty stapler drives BeA type 14 and type 155 staples in length from 25 to 50 mm. The top loading magazine holds 150 staples. The 14/50-763 A stapler has a quick release nose for easy jam clearance. The slender nose affords better operator visibility for more precise fastener placement. The cycling frequency can be adjusted infinitely from 0-500 cycles per minute.

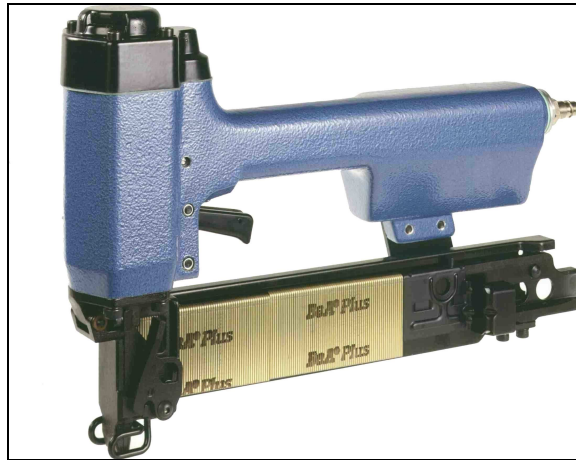

Popular applications:

Expendable pallets, sheathing, roof decking, subflooring, furniture frame assembly.

Length:	334 mm
Width:	70 mm
Height:	244 mm

Technical data

Type description:	14/50-763 A Automatic
Article code:	12000360
Magazine type :	Top loader
Fastener type:	Type 14 / type 155
Magazine capacity:	156 / 144
Fasteners per strip:	2 x 75 / 2 x 70
Operating pressure:	6 – 8 bar
Max. operating pressure:	8 bar
Air consumption/operation:	1,5 litre / 6 bar
Inner hose diameter:	Ø 9 mm LW recommended
Emission sound pressure level at the workstation:	L pA, 1s, d= 90 dB
Single-shot emission sound pressure level:	L WA, 1 s,d= 97 dB
Weight:	2,8 kg

The vibration as per document no. CEN/TC 255 WG 1 N 47.3 is 3,3 m/s²

Extras supplied with the nailer:

Operating instructions, spare parts list, service instructions, silencer.

Subject to technical modifications.

Accessories:

Articel code	Description
14406172	Exhaust set

All BeA pneumatic tools can be jig-mounted
We supply the necessary accessories and equipments.




This tool conforms to the EG Directive
for Machinery (89/392 EWG)

Pneumatic Tacker Type 14/50-763 A



BeA Deutschland
Befestigungstechnik GmbH
P.O.Box 14 80
D-22904 Ahrensburg
Phone: (04102) 78-0
Fax: (04102) 78-250
www.bea-group.com
e-mail: info@bea-group.com

Klammern Typ 14 und Typ 155

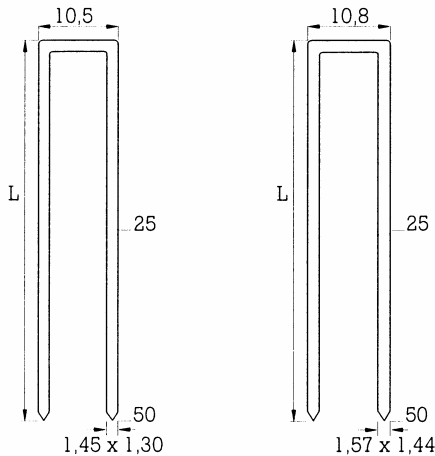

Description	L = Length mm
14/25 NK HZ	25
14/28 NK HZ	28
14/30 NK HZ	30
14/32 NK HZ	32
14/35 NK HZ	35
14/38 NK HZ	38
14/40 NK HZ	40
14/45 NK HZ	45
14/50 NK HZ	50

155/25 NK HZ	25
155/28 NK HZ	28
155/30 NK HZ	30
155/32 NK HZ	32
155/35 NK HZ	35
155/38 NK HZ	38
155/40 NK HZ	40
155/45 NK HZ	45
155/50 NK HZ	50

Staples type 155 also available in NR HZ and VZ HZ.
Other lengths and finishes are also available on request.

Explanations:

NK = galvanized steel	BK = bright steel	LM = aluminium	HZ = resin coated
NKS = galvanized steel, extra hard	BKS = bright steel, extra hard	NR = stainless steel, material. 1.4401	DP = divergent point
NKH = galvanized steel, hard	MS = brass	RF = rust resistant, material 1.4301	SA = step cut