

## Pneumatic Nailer Type SN 40-351

The BeA coil nailer drives plasterboard nails, nail screws and slate nails from 26 mm to 40 mm. The two nail guiding blocks at the end of the tool position the nail vertically into the substrate during the driving sequence. The standard tool is equipped with a depth adjuster ensuring consistent penetration. The plastic tape, collating the nails, is fed past the nose without leaving any plastic residue at the nail head. The low weight of 1.3 kg, the directional exhaust and the insulated grip make this a very user friendly tool.



### Popular applications:

Fixing plaster boards and other building boards, furniture manufacture

Length:	260 mm
Width:	126 mm
Height:	224 mm

### Technical data

Type description:	<b>SN 40-351</b> <b>Contact</b>
Article code:	12100009
Magazine type :	Side loader
Safety:	Contact actuation
Fastener type:	Type TC
Magazine capacity:	200
Fasteners per coil:	1 x 200
Operating pressure:	5 – 7 bar
Max. operating pressure:	7 bar
Air consumption/operation:	1.5 litre / 6 bar
Inner hose diameter:	Ø 9 mm LW recommended
Emission sound pressure level at the workstation:	L pA, 1s, d= 90 dB
Single-shot emission sound pressure level:	L WA, 1 s,d= 97 dB
Weight:	1.3 kg

The vibration as per document no. CEN/TC 255 WG 1 N 47.3 is 3.64 m/s<sup>2</sup>.

**Extras supplied with the nailer:** Operating instructions, spare parts list, service instructions, silencer. For safety reasons we recommend the BeA single release if working pressure allows this.

Subject to technical modifications.

### Accessories:

Article code	Description
14500374	Touch Release
14504920	Touch Release Set

All BeA pneumatic tools can be jig-mounted  
We supply the necessary accessories and equipments.



This tool conforms to the EG Directive  
for Machinery (89/392 EWG)


## Pneumatic Nailer Type SN 40-351



BeA Deutschland  
Befestigungstechnik  
P.O.Box 14 80  
D-22904 Ahrensburg  
Phone: (04102) 78-0  
Fax: (04102) 78-250  
www.bea-group.com  
e-mail: [info@bea-group.com](mailto:info@bea-group.com)

### Nails type TC

a division of  
Joh. Friedrich Behrens AG

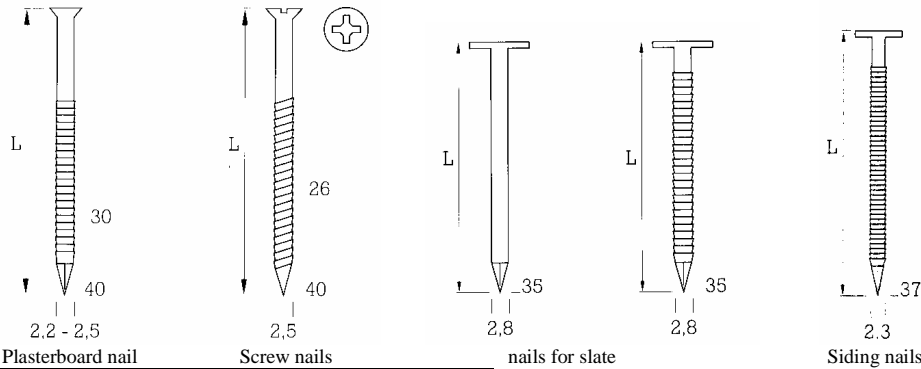

Description	L = Length mm
-------------	---------------------

#### Plasterboard nails\*

TC 2,2 x 30 NK Ring GK	30
TC 2,2 x 35 NK Ring GK	35
TC 2,2 x 40 NK Ring GK	40

TC 2,5 x 30 NK Ring GK	30
TC 2,5 x 35 NK Ring GK	35
TC 2,5 x 40 NK Ring GK	40

\* Plasterboard nails are certified to DIN 1052, part 2 chapter 6, load capacity class III.

#### Nail screws with cross recessed head

TC 2,5 x 26 NK Nail screw	26
TC 2,5 x 30 NK Nail screw	30
TC 2,5 x 35 NK Nail screw	35
TC 2,5 x 40 NK Nail screw	40

#### Nails for slate

TC 2,8 x 35 FV	35
TC 2,8 x 35 Copper Ring	35
TC 2,8 x 35 NR Ring	35

Other lengths and finishes are also available on request.

#### Explanations:

NK = galvanized steel	BK = bright steel	LM = aluminium	HZ = resin coated
NKS = galvanized steel, extra hard	BKS = bright steel, extra hard	NR = stainless steel, material. 1.4401	DP = divergent point
NKH = galvanized steel, hard	FV = hot dipped galvanized	RF = rust resistant, material 1.4301	SA = step cut