

# Pneumatic Nailer Type 901 DC

The BeA 901 DC is a compact and well balanced tool for heaviest applications. The tool is so powerful that ring shank nails will countersink even into hardwood.. The 901 DC drives wire welded nails with diameter 2.5 to 3.3. mm in the length of 50 to 90 mm. The comfortable rubber grip and the adjustable exhaust make the tool operator friendly.



### Popular applications:

Siding, pallets, cases, sheathing, sub flooring, house construction

Length: 310 mm  
Width: 131 mm  
Height: 366 mm

### Technical data

Type description:	901 DC	901 DC Duplex
Article code:	12100462	without
Magazine type :	Coil magazine / top loader	Coil magazine / toplayer
Safety:	Contact actuation	Contact actuation
Fastener type:	BDC	BDC
Magazine capacity:	1 Coil, max. 334 nails	1 coil, max. 334 nails
Nails per Coil:	Ø 2,5 = 300 / 334 Ø 2,8 = 275 / 278 Ø 3,1 = 250	Ø 3,1 = 200
Operating pressure:	5 - 8 bar	5 - 8 bar
Max. operating pressure:	8 bar	8 bar
Air consumption/operation:	4 litre / 6 bar	4 Liter / 6 bar
Inner hose diameter:	Ø 9 - 10 mm LW recommended	Ø 9 mm LW empfohlen
Emission sound pressure level at the workstation:	L pA, 1s, d= 96 dB	L pA, 1s, d= 96 dB
Single-shot emission sound pressure level:	L WA, 1 s,d= 104 dB	L WA, 1 s,d= 104 dB
Weight:	3.8 kg	3,8 kg

The vibration as per ISO 8662-11 is 4.6 m/s<sup>2</sup>.

### Extras supplied with the stapler:

Operating instructions, spare parts list, service instructions, silencer.  
For safety reasons we recommend the BeA single release if working pressure allows this.

Subject to technical modifications.

### Accessories:

Article code	Description

All BeA pneumatic tools can be jig-mounted  
We supply the necessary accessories and equipments.



This tool conforms to the EG Directive for Machinery (98/37 EC)


# Pneumatic Nailer Type 901 DC







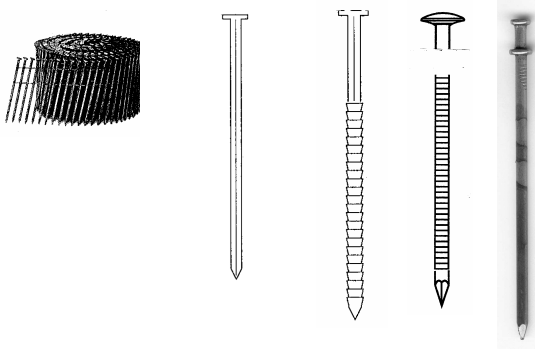


Coilnails BDC  
16° wire-collated nails

Duplexnägel



Joh. Friedrich Behrens AG  
P.O.Box 14 80  
D-22904 Ahrensburg  
Phone: +49 (0) 4102 78-0  
Fax: +49 (0) 4102] 78-250  
www.bea-group.com  
e-mail: info@bea-group.com




Description	L = Length mm	
BDC 2,5 x 50 - 70 BK / BK Ring	50 - 70	 ( BK Ring )
BDC 2,5 x 65 NK	65	
BDC 2,5 x 50 - 70 NK Ring	50 - 70	
BDC LK 2,5 x 55 - 65 NR Ring	55 - 65	
BDC 2,8 x 60 - 80 BK / BK Ring	60 - 80	 ( BK Ring )
BDC 2,8 x 60 - 75 NK Ring	60 - 75	
BDC LK 2,8 x 65 - 80 NR Ring	65 - 80	
BDC NG 2,8 x 65 NK Pozi	65	
BDC 3,1 x 70 - 90 BK / BK Ring	70 - 90	 ( BK Ring )
BDC 3,1 x 80 - 90 NK / NK Ring	80 - 90	 ( NK Ring )
BDC 3,1 x 80 - 90 BK Screw	80 - 90	
BDC 3,1 x 80 - 90 NR Ring	80 - 90	
BDC 3,1 x 90 NK Screw	80 - 90	

Duplex-nails:

Length mm (complete)

BDC 3,1 x 60 BK DUPL	60	
BDC 3,1 x 65 BK DUPL	65	10501782
BDC 3,1 x 70 BK DUPL	70	
BDC 3,1 x 80 BK DUPL	80	
BDC 3,1 x 90 BK DUPL	90	

*Other lengths and finishes are also available on request.*

Nails are certified to DIN 1052 Part 2 

#### Explanations:

NK = galvanized steel	BK = bright steel	LM = aluminium	HZ = resin coated
KS = galvanized steel, extra hard	BKS = bright steel, extra hard	NR = stainless steel, material. 1.4401	DP = divergent point
NKH = galvanized steel, hard	MS = brass	RF = rust resistant, material 1.4301	SA = step cut